

CEMA Safety Label Placement Guidelines

CEMA Safety Labels

Placement Guidelines

Product: Unit Handling

Equipment: Motor Driven Live Roller Conveyors

To be placed along both sides of these conveyors since these conveyors provide surfaces and profiles attractive, but hazardous, for climbing, sitting, walking, or riding.



"A"

SPACE UP TO A MAXIMUM OF 20 FT. CENTERS (BOTH SIDES)

Optional Label to be placed either on the side or top of rails when space available does not permit application of the larger label.



"B"

SPACE UP TO A MAXIMUM OF 20 FT. CENTERS (Sides or top surface of both rails)

To be placed along the sides of these conveyors to warn personnel that the conveyor can start automatically.



"C"


SPACE UP TO A MAXIMUM OF 20 FT. CENTERS (BOTH SIDES)

Optional Label to be placed either on the side or top of rails when space available does not permit application of the larger label.



"D"

SPACE UP TO A MAXIMUM OF 20 FT. CENTERS (Sides or top surface of both rails)

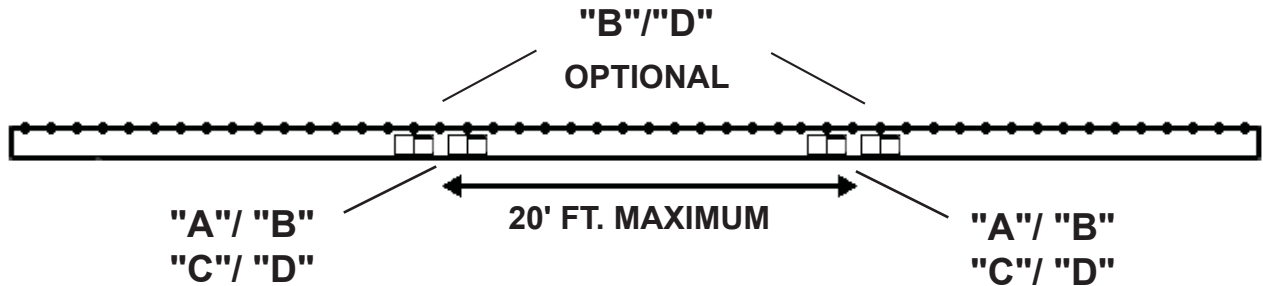

NOTE: Due to the design of these conveyors, there may not be room on the side rails to place the larger labels. In that case, the smaller labels may be used. Optionally, they may also be placed on the top surface of both rails. The key is the space available and visibility by maintenance and operators.

